

HELI

CBS05J
Semi-electric stacker


Characteristics:

- High quality hydraulic oil cylinder and circuit system ensures stable and reliable operation.
- Emergency power-off button cuts off the power in case of emergency.
- External positioned charger has better cooling performance and avoids the damage caused by the vibration when operating the truck with internal positioned one.
- The truck is simple and dexterous, with small weight. It is easy to operation.

CBS05J

Manufacturer's Data and Design Characteristics

Characteristics		HELI			
1.01	Manufacturer	CBS05J			
1.02	Model	CBS05J			
1.03	Capacity	Q(Kg)	500	500	500
1.04	Load center	C(mm)	400	400	400
1.05	Type of lifting		Electric	Electric	Electric
1.06	Type of travelling		Walkie	Walkie	Walkie
1.07	Net weight	Kg	175	195	215
Wheels					
2.01	Wheel type		Nylon/PU	Nylon/PU	Nylon/PU
2.02	Wheel base	y(mm)	850	850	850
2.03	Front wheel base	W1(mm)	380	380	380
2.04	Back wheel base	b10(mm)	672	672	672
2.05	Quantity of Steering/Bearing/Balance Wheel		2/2/6	2/2/6	2/2/6
2.06	Bearing wheel size	mm	Φ80×50	Φ80×50	Φ80×50
2.07	Steering wheel size	mm	Φ100×50	Φ100×50	Φ100×45
2.08	Balance wheel size	mm	Φ40×30	Φ40×30	Φ40×30
2.09	Training wheel size	mm	Φ30×30	Φ30×30	Φ30×30
Dimensions					
3.01	Min.fork height	mm	90	90	90
3.02	Max.fork height	h3(mm)	900	1100	1300
3.03	Fork outside width	W3(mm)	540	540	540
3.04	Fork inside width	mm	220	220	220
3.05	Fork length	L(mm)	1150	1150	1150
3.06	Single fork size	e/s(mm)	160X60	160X60	160X60
3.07	Overall length	L1(mm)	1555	1555	1555
3.08	Overall width	W(mm)	790	790	790
3.09	Overall height	H1(mm)	1217	1417	1617
3.10	Whole height(after tape file shelf)	H4(mm)	2470	2670	2870
3.11	Min.turning radius	Wa(mm)	1120	1120	1120
Performance					
4.01	Lifting speed(laden/unladen)	mm/s	70/100	70/100	70/100
4.02	Lowering speed(laden/unladen)	mm/s	100/80	100/80	100/80
4.03	Lift motor	Kw	12/0.8	12/0.8	12/0.8
4.04	Battery capacity	V/Ah	12/33	12/33	12/33
4.05	Battery weight	Kg	10	10	10

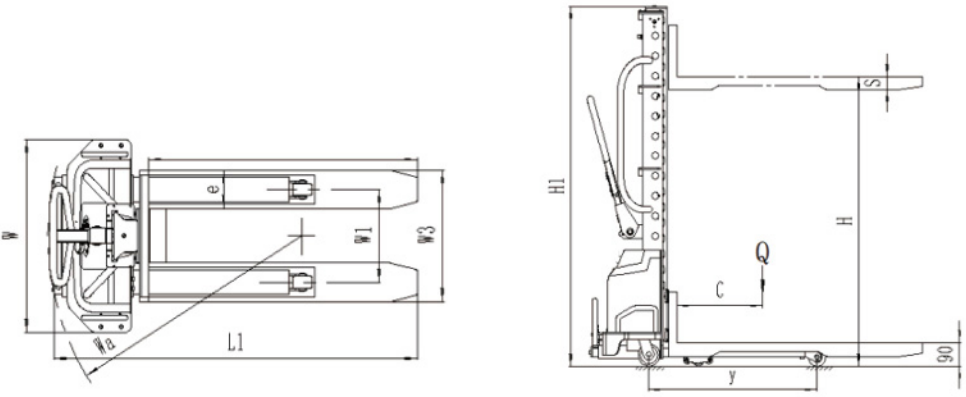

Design&Print:Fokeli Printing 20220316



ANHUI HELI CO., LTD.
Add / No.668, FangXing Road, Hefei, China
Fax / +86-551-63639966
Tel / +86-551-63639068(America); 63639258(Europe); 63639358(Asia);
63662105(Africa & Middle East); 63639530(Overseas Marketing)



Linked in



YouTube



Facebook

* For exhibition only. Our products are subject to improvements and changes without notice.